


# THE NEVERLEAK COMPANY, LP

## SPECIFICATION SUBMITTAL SHEET

### NEVA-CALK™ ALUMINUM BASE MULTI-FIT™ ROOF FLASHINGS

#### SPECIFICATION:

Deep drawn commercially pure aluminum base .025 thick (25 mil.), which offers excellent corrosion resistance. A premium elastomeric Multi-Fit™ collar is mechanically locked to the base to form a one-piece assembly. All made from prime/virgin materials.

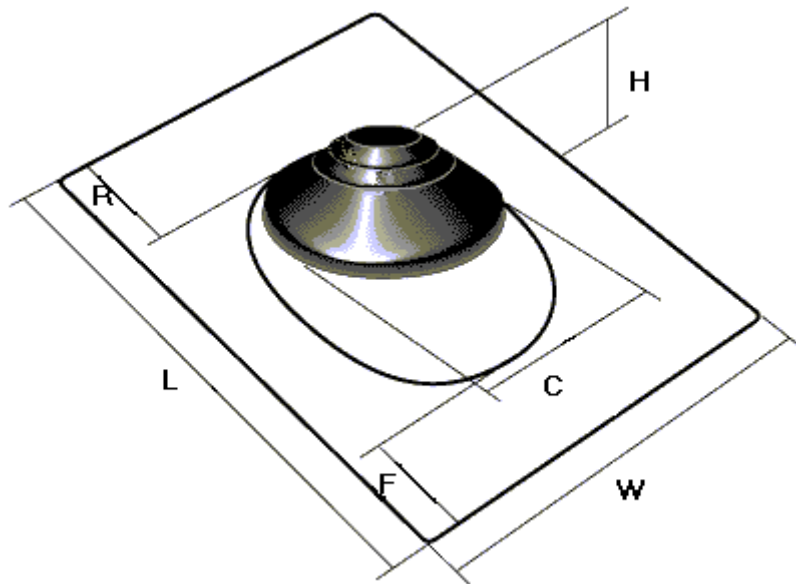

Multi-Fit™ Roof Flashing Dimensional Characteristics							
Stock#	Vent Size	Dim. W	Dim. L	Dim R	Dim. F	Dim. C	Dim. H
AN123	1.25" - 2" - 3"	10.75"	14.5"	4.25"	2.5"	5.25"	2.75"
AN340	3" - 4"	11.75"	15.5"	4.5"	2.5"	6.5"	3"

#### ASTM INFORMATION:

##### Aluminum:

ASTM B209 FED QQA 250011 AMS 4001 UNS A91100 Dead Soft Aluminum

##### Premium Elastomeric Collar:

Typical Values: Durometer Hardness Shore A 67, ASTM D2240. Elongation at break 450%, ASTM D412.

**Do not use petroleum-based mastics, sealing compounds or paints on collar!**