

# THE NEVERLEAK COMPANY, LP


## SPECIFICATION SUBMITTAL SHEET

### NEVA-CALK™

### GALVANIZED BASE MULTI-FIT™ ROOF FLASHINGS

#### SPECIFICATION:

Prime quality, chemically treated galvanized steel. Heavy duty G-90 zinc coating for extended weathering and rust prevention. A premium elastomeric Multi-Fit™ collar is mechanically locked to the base to form a one-piece assembly. All made from prime/virgin materials.

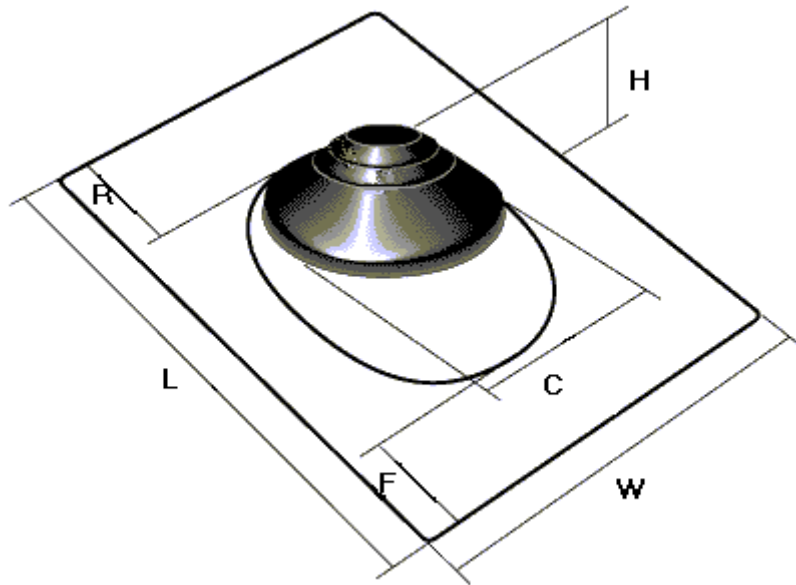

<b>Multi-Fit™ Roof Flashing Dimensional Characteristics</b>							
<b>Stock#</b>	<b>Vent Size</b>	<b>Dim. W</b>	<b>Dim. L</b>	<b>Dim R</b>	<b>Dim. F</b>	<b>Dim. C</b>	<b>Dim. H</b>
GN123	1.25"-2"- 3"	10.75"	14.5"	4.25"	2.5"	6"	2.75"
GN340	3" - 4"	11.75"	15.5"	4.5"	2.5"	7.5"	3"

#### ASTM INFORMATION:

##### Galvanized:

ASTM A 653/A 653M

##### Premium Elastomeric Collar:

Typical Values: Durometer Hardness Shore A 67, ASTM D 2240. Elongation at break 450%, ASTM D412.

**\*Do not use petroleum base mastics, sealing compounds or paints on collar!**